



AGI

4" GALVANIZED STORAGE



IT'S NOT JUST A BIN

AGI has a diverse product offering to help you make a little extra time for yourself and the ones you share a table with.

AN AGI SOLUTION FOR EVERY STORAGE NEED

AGI offers a range of galvanized solutions to meet the diversity of needs and applications. Moreover, each one incorporates the latest innovations and science in storage technology, providing you confidence that the material you are storing is indeed protected.

WARRANTY

- 5-year warranty of corrugated bins

SAFETY ASSURANCE

Safety is always top-of-mind at AGI. Whether it be inside or outside the bin, the AGI engineering team is dedicated to your safety. Products are designed to applicable codes and jurisdictional requirements, and go above and beyond to ensure the safest product possible.



FLAT BOTTOM BINS

AGI's premium quality storage solution, flat bottom bins are built with today's farmers in mind. Engineered for superior strength and utilizing heavy gauge, ultra-flat corrugated steel, flat bottom bins are tested for all weather conditions around the world.

BIN SHEETS 4" WIDE CORRUGATION

Sheets are rolled from high strength, 65,000 PSI tensile strength and are 44" tall, allowing for stronger, yet lighter sheets; therefore, fewer seams for improved weather protection.

EXTRA STRONG CONSTRUCTION THROUGHOUT

Engineers have designed the maximum strength out of every pound of steel to give you superior structural strength over the entire bin. That means a bin better equipped to handle the added weight of heavy snow loads, or the structural stress of extreme temperature conditions and high winds.

EXCEPTIONAL BIN CLEAN-OUT

An ultra-flat 4" wide corrugation pattern and lack of internal stiffeners delivers far superior bin clean-out, virtually eliminating the possibility of grain hang-up.

DESIGNED FOR EASY ASSEMBLY


Flat bottom bins benefit from a computer assisted manufacturing process that produces precision cut sheets every time. The result is tighter seals at the connection points and an easier to assemble bin overall. Installation of a full floor aeration system is also easy, thanks to the pre-punching of holes in the bottom sheet.

UNSTIFFENED

AGI bins are engineered to eliminate the need for internal or external stiffeners. The result is an extremely strong, expandable bin with on-farm sizes ranging from 1,850 - 72,720 bushels.

STIFFENED

Stiffened sidewall bins are more efficient at achieving the maximum load possible out of each pound of steel as compared to competitive unstiffened bins. Their heavy-duty super-robust walk-in door design gives you the flexibility to add tiers to your bin when required without having to upgrade your door. They also features a more precise, cleaner assembly without unsightly welds for a super-tight fit. An improved latch design makes the door easier to open and operate, and the redesigned doorframe eliminates all gaps for the best seal possible. Ranging from 2,940 - 722,200 bushels.

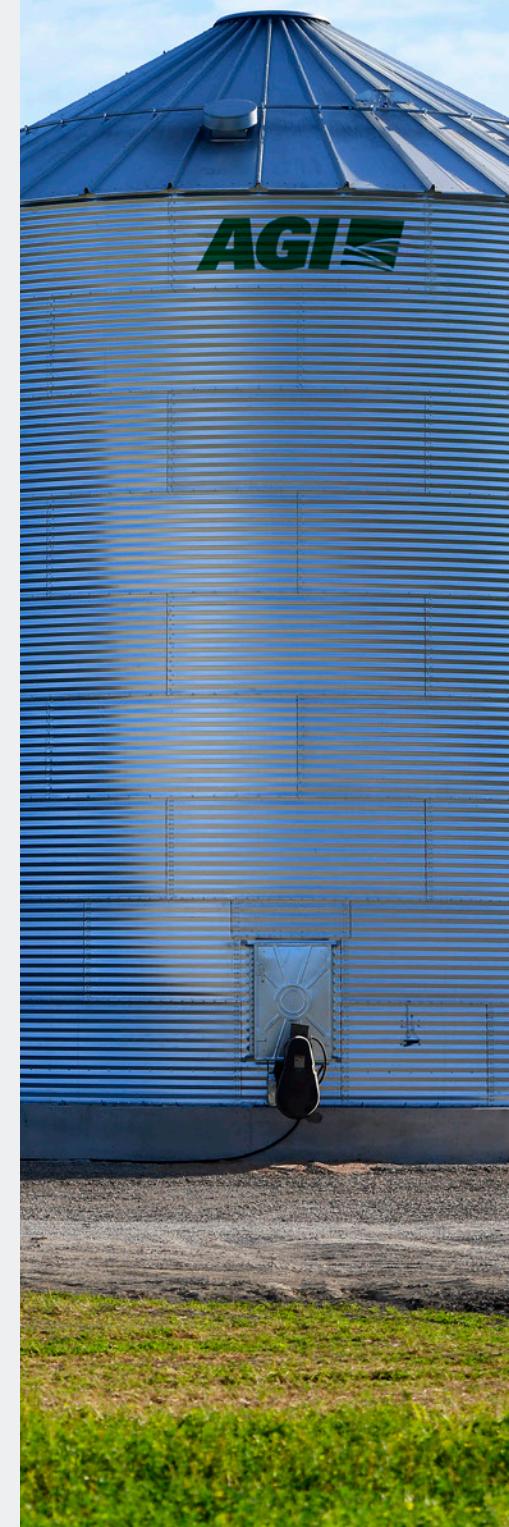

QUALITY TOP TO BOTTOM


OPTIONAL ACCESSORIES

- Customizable platforms and catwalks
- Pre-stamped vent openings on roof sheets
- Round and gooseneck vent options
- Circular stairs
- Interior ladders
- Exterior ladders with pass-through rails
- Safety cages
- Auger chute
- Sealform foundation system
- Lock-n-Load® floor system
- AGI EasyFlow® 2 U-trough or tube bin unload system
- Aeration fans and transitions
- Side draw
- Walk-in door
- Level alert grain gauge

ADVANCED CONTINUOUS ROOF ANGLE

Advanced roof design up to 63% stronger

With a roof designed for faster assembly and improved overall strength, it can provide up to 124% greater bend resistance resulting in greater snow load capacity over conventional roof designs. Manufactured using the latest in computerized automated production equipment, the roof has fewer parts than the competition. The production process also allows for pre-stamped vent openings, eliminating the need to cut openings on site.

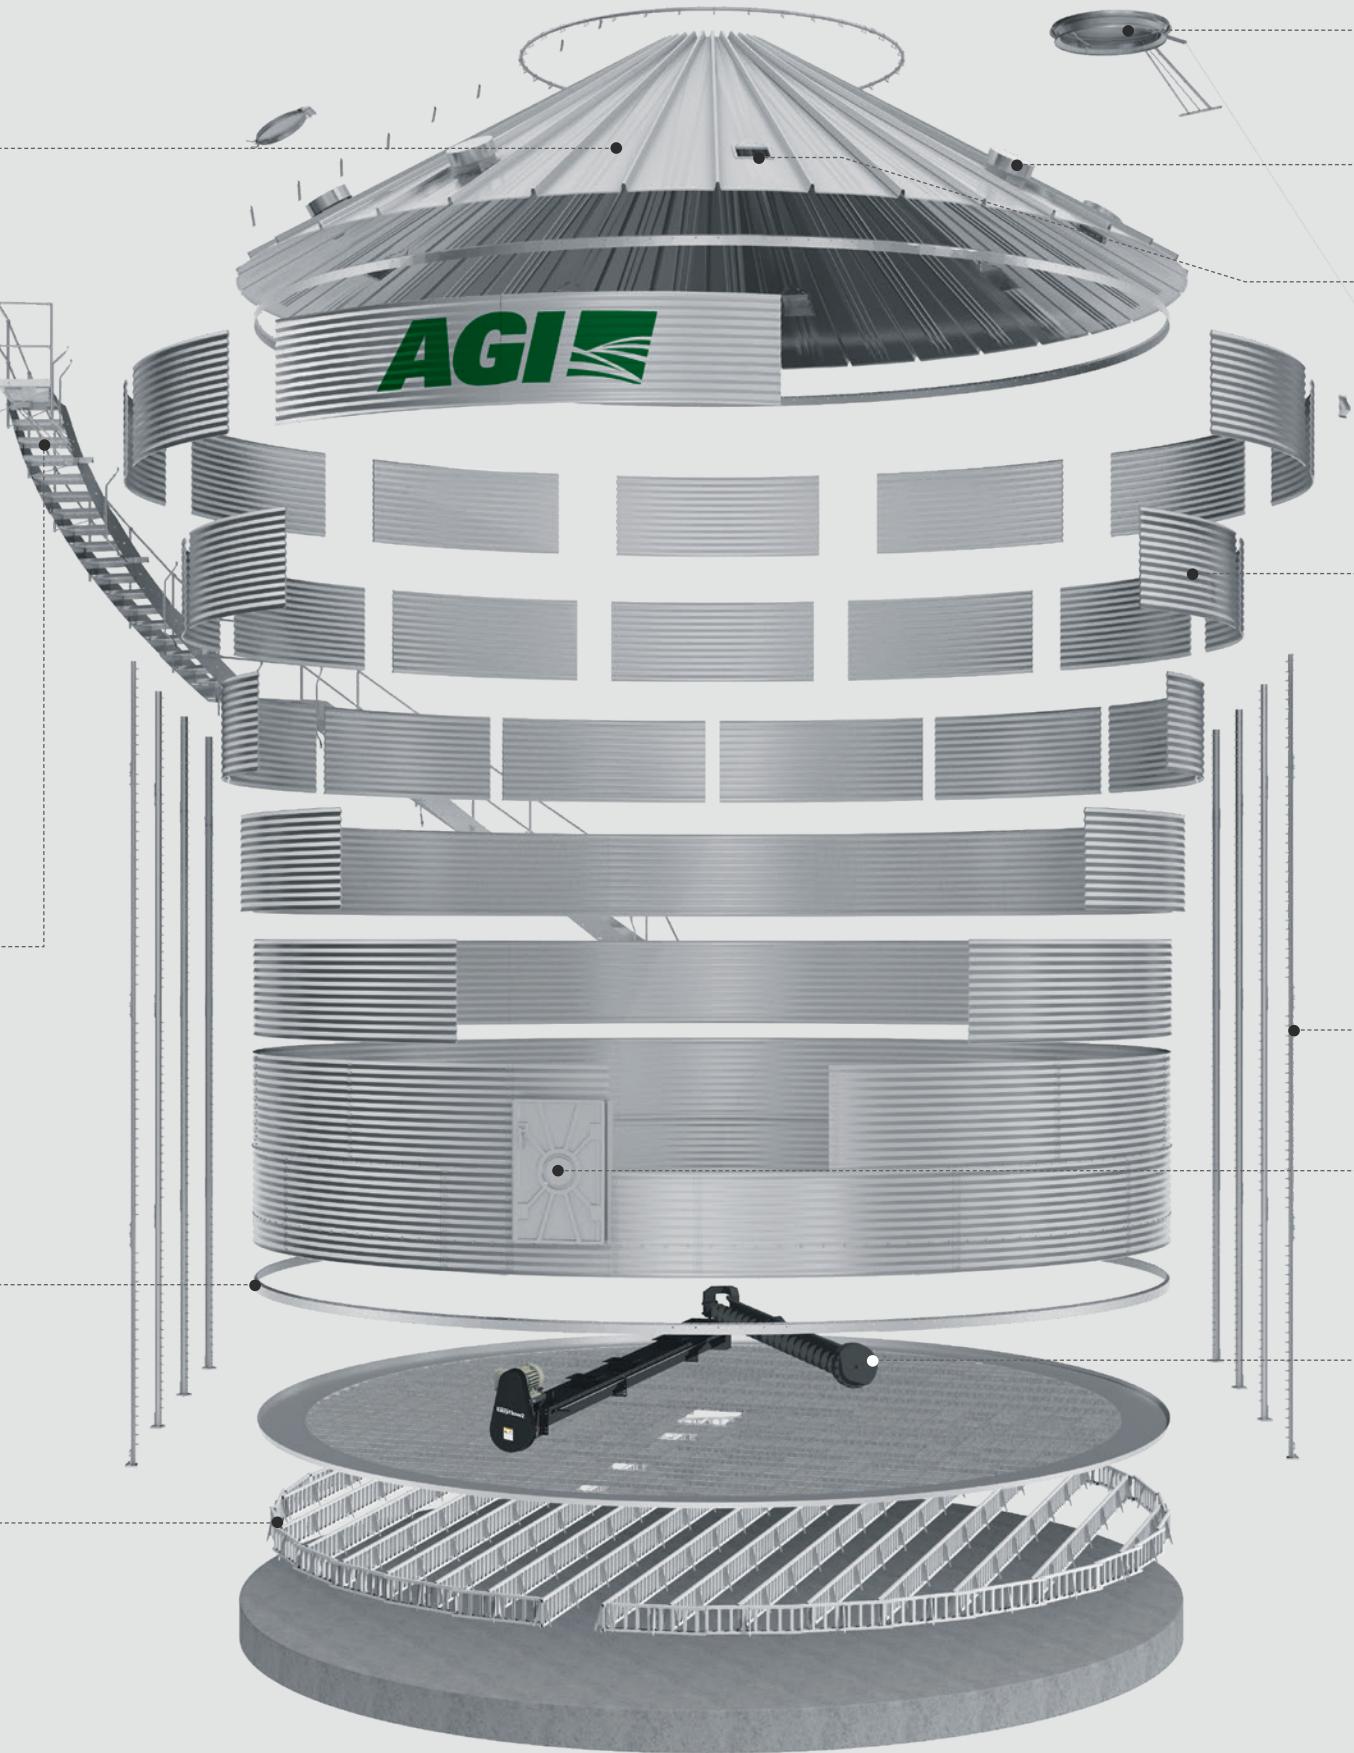

33" CAP FOR BINS 15'-27'
55" CAP FOR BINS 27'-54'

15" ROUND OR GOOSENECK
GALVANIZED ROOF VENTS

PRE-PUNCHED RAISED EDGING HOLES

To help prevent water from entering the bin.

4" WIDE CORRUGATION

VARIABLE SECTION STIFFENERS (VSS)

Available only on stiffened models this innovative upright technology works on the principle that the greater the vertical load required, the larger the stiffener section should be, and matches stiffener thickness and size to the vertical load. Variable section stiffeners also make use of a laminating system, which maximizes strength while minimizing the use of splice plates in most connections making for an easier installation.

51" BY 33" ACCESS DOOR

Constructed with a heavy duty sturdy welded frame making it reliable and cost effective.

AGI EASYFLOW 2 UNLOADS

AGI's EasyFlow 2, standard output and high output unload systems are designed for the rigors of on-farm use and feature superior durability, strength and performance.

CONTINUOUS BOTTOM RING ANGLE

LOCK-N-LOAD FLOOR SYSTEM

Lock-n-Load floor system delivers maximum performance when full volume conditioning or natural air-drying is required.


FLOOR & UNLOADING SYSTEMS

AGI EASYFLOW 2 UNLOAD SYSTEMS

AGI EasyFlow 2 unload systems are designed for the rigors of on-farm use and feature superior durability, strength and performance. Make grain clean-out easy and efficient with the AGI EasyFlow 2 U-trough or tube unload systems.

KEY FEATURES

- Large double center gearbox with solid, common shaft for increased longevity
- Ability to remove the unload flight without removing the motor or rest of the powerhead allows for easy maintenance
- Improved clean out thanks to an aggressive wheel tread pattern, unique fender on the end wheel and adjustable backboard
- Extra wide sump opening allows for higher capacity grain flow into unload system
- Optional E-sump with independent controls positioned near the center sump enables the bin to be emptied if the center sump is blocked

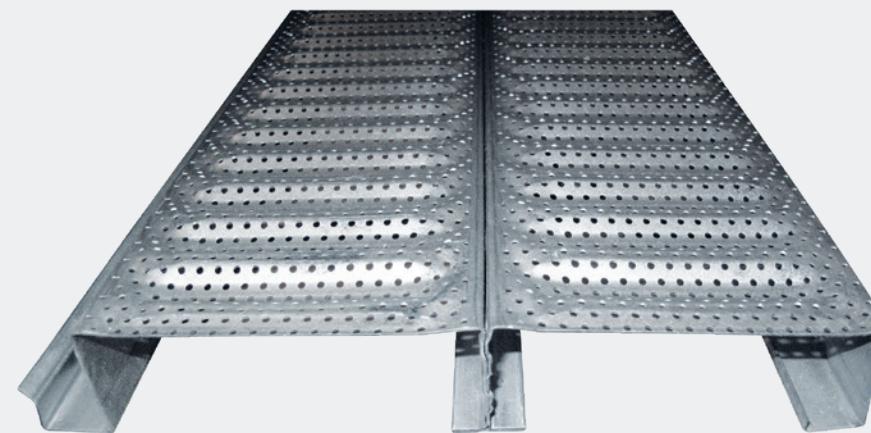

LOCK-N-LOAD FLOOR SYSTEM

Supports up to 100 feet of grain depth.

The Lock-n-Load floor system delivers maximum performance when full volume conditioning or natural air-drying is required. The open design of the floor supports provides unrestricted air movement underneath the floor which allows for increased air movement through the grain mass.

Flooring is available in two perforation sizes:

- 20 ga. 0.054 perforation for small grains such as canola, wheat, etc.
- 20 ga. 0.094 perforation for larger grains such as corn, beans, etc.


With unbeatable strength and a 10" plank and support system for ease of installation, the aeration floors are the best way to protect your grain.

The A-frame floor support system, designed specifically to fit with the Lock-n-Load floor system package, has reinforced columns which provide less resistance to airflow without sacrificing strength. The galvanized supports and planks are lightweight, making it easier to install and manipulate without compromising strength or integrity.



TUBE UNLOAD

Available for bin sizes 24' to 48' in diameter
8" | 3,000 BPH

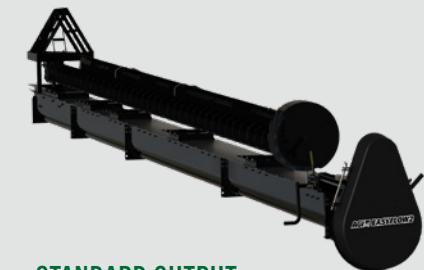

STANDARD OUTPUT U-TROUGH UNLOAD

Available for bin sizes 21' to 60' in diameter
9" | 5,000 - 7,500 BPH




HIGH OUTPUT U-TROUGH UNLOAD

Available for bin sizes 24' to 60' in diameter
11" | 6,000 - 9,000 BPH



CENTRIFUGAL FANS



LOW SPEED CENTRIFUGAL FANS

AGI low speed centrifugal fans are designed to maximize airflow at lower to medium static pressure.

- Available in 5-50 HP models



HIGH SPEED CENTRIFUGAL FANS

AGI high speed centrifugal fans are designed to maximize airflow at medium to high static pressure.

- Available in 3-40 HP models



IN-LINE CENTRIFUGAL FANS

AGI in-line centrifugal fans are designed to maximize airflow at low to medium static pressures in cereal grains.

- Available in 3-15 HP models

SUPPLEMENTAL HEATERS



LOW TEMPERATURE DOWNSTREAM HEATERS

AGI low temperature downstream heaters allow for 24 hour grain drying when high humidity conditions prevail. The heater is easily installed between the fan and bin.

- Pairs with 3-15 HP high speed and in-line fans
- Available in 60K-200K BTU models



HIGH TEMPERATURE DOWNSTREAM HEATERS

AGI high temperature downstream heaters are designed to increase temperature while decreasing humidity. Recommended to be used with a stirrator system. Allows for crops to be efficiently and effectively dried inside of your grain bin.

- Pairs with 10-15 HP low speed fans
- 200K-2,350K BTU with 10-15 HP fans
- 603K-4,230K BTU with 20-50 HP fans



LOW TEMPERATURE UPSTREAM HEATERS

AGI low temperature upstream heaters are your solution when a slight rise in temperature is required to help reduce humidity in your bin. Low temp heaters are designed to provide a consistent amount of heat which results in less cycling and increases the life of components.

- Pairs with 10-50 HP low speed fans
- 37K-346K BTU range



ROOF EXHAUSTERS

- Expected airflow output of 10,000 CFM
- Standard rain hood with 1/2" wire mesh bird screen
- Over-rib and between-rib models available
- 1750 rpm 2hp motors available in explosion proof and non-explosion proof options

ACCESSORIES

- Transitions
- Adapters
- Fan supports
- Static pressure gauges
- Plenum thermometers

Flat Bottom Bins Unstiffened													
Model Number	Tiers	Diameter		Capacity ⁽¹⁾			Eaves Height		Overall Height ⁽⁴⁾		Weight		
		#	ft	m	bu ⁽²⁾	m ³	tonnes ⁽³⁾	ft	m	ft	m	lb	kg
1503	3	15'	4.55 m	1850	62	50	11' 2"	3.40	15' 3"	4.66	2100	950	
1504	4			2400	80	65	14' 10"	4.52	18' 11"	5.78	2500	1150	
1505	5			2940	98	80	18' 6"	5.64	22' 7"	6.89	3100	1400	
1506	6			3490	116	95	22' 2"	6.76	26' 3"	8.01	3600	1650	
1507	7			4040	134	109	25' 10"	7.87	29' 11"	9.13	4300	1950	
1803	3			2720	91	74	11' 2"	3.40	16' 2"	4.92	2500	1100	
1804	4			3500	117	95	14' 10"	4.52	19' 10"	6.04	3000	1350	
1805	5	18'	5.46 m	4290	143	116	18' 6"	5.64	23' 6"	7.16	3700	1650	
1806	6			5080	169	138	22' 2"	6.76	27' 2"	8.27	4500	2050	
1807	7			5860	196	159	25' 10"	7.87	30' 10"	9.39	5400	2450	
2103	3	21'	6.37 m	3770	126	102	11' 2"	3.40	17' 0"	5.18	3000	1350	
2104	4			4840	162	131	14' 10"	4.52	20' 8"	6.30	3700	1650	
2105	5			5910	198	160	18' 6"	5.64	24' 4"	7.42	4400	2000	
2106	6			6980	233	189	22' 2"	6.76	28' 0"	8.54	5400	2450	
2107	7			8050	269	218	25' 10"	7.87	31' 8"	9.65	6400	2900	
2108	8			9130	304	248	29' 6"	8.99	35' 4"	10.77	7600	3450	
2403	3			5020	168	136	11' 2"	3.40	17' 10"	5.45	3500	1550	
2404	4	24'	7.28 m	6420	215	174	14' 10"	4.52	21' 6"	6.56	4200	1900	
2405	5			7820	261	212	18' 6"	5.64	25' 2"	7.68	5100	2300	
2406	6			9220	308	250	22' 2"	6.76	28' 10"	8.80	6300	2850	
2407	7			10620	354	288	25' 10"	7.87	32' 6"	9.92	7700	3450	
2408	8			12010	401	326	29' 6"	8.99	36' 2"	11.03	9000	4100	
2703	3	27'	8.19 m	6480	217	176	11' 2"	3.40	18' 9"	5.71	4200	1900	
2704	4			8250	276	224	14' 10"	4.52	22' 5"	6.83	5100	2300	
2705	5			10020	335	272	18' 6"	5.64	26' 1"	7.94	6100	2750	
2706	6			11790	394	320	22' 2"	6.76	29' 9"	9.06	7400	3350	
2707	7			13560	453	368	25' 10"	7.87	33' 5"	10.18	9000	4050	
2708	8			15330	511	416	29' 6"	8.99	37' 1"	11.30	10500	4750	
2709	9			17100	570	464	33' 2"	10.11	40' 0"	12.41	12300	5600	
3004	4	30'	9.1 m	10330	346	280	14' 10"	4.52	22' 10"	6.97	6100	2750	
3005	5			12510	419	339	18' 6"	5.64	26' 6"	8.09	7500	3400	
3006	6			14700	491	399	22' 2"	6.76	30' 2"	9.20	8900	4050	
3007	7			16880	564	458	25' 10"	7.87	33' 10"	10.32	10700	4850	
3008	8			19070	637	517	29' 6"	8.99	37' 6"	11.44	12600	5700	
3009	9	33'	10.01 m	21250	709	577	33' 2"	10.11	41' 2"	12.56	14800	6700	
3304	4			12680	425	344	14' 10"	4.52	23' 0"	7.23	7100	3200	
3305	5			15320	513	416	18' 6"	5.64	27' 5"	8.35	8600	3900	
3306	6			17970	601	487	22' 2"	6.76	31' 1"	9.47	10200	4650	
3307	7			20610	689	559	25' 10"	7.87	34' 9"	10.58	12100	5500	
3308	8	36'	10.91 m	23250	777	631	29' 6"	8.99	38' 5"	11.70	14300	6500	
3309	9			25900	865	702	33' 2"	10.11	42' 1"	12.82	16600	7550	
3604	4			15300	514	415	14' 10"	4.52	24' 7"	7.49	8100	3650	
3605	5	39'	11.82 m	18450	618	500	18' 6"	5.64	28' 3"	8.61	9800	4450	
3606	6			21590	723	586	22' 2"	6.76	31' 11"	9.73	11500	5250	
3607	7			24740	827	671	25' 10"	7.87	35' 7"	10.85	13600	6200	
3608	8			27890	932	756	29' 6"	8.99	39' 3"	11.96	16000	7250	
3609	9			31030	1036	842	33' 2"	10.11	42' 11"	13.08	18500	8400	
3905	5	42'	12.73 m	21900	734	594	18' 6"	5.64	29' 1"	8.87	10800	4900	
3906	6			25600	857	694	22' 2"	6.76	32' 9"	9.99	13100	5950	
3907	7			29290	980	794	25' 10"	7.87	36' 5"	11.11	15300	6950	
3908	8			32980	1103	895	29' 6"	8.99	40' 1"	12.23	17900	8150	
3909	9			36670	1225	995	33' 2"	10.11	43' 9"	13.35	20700	9400	
4204	4	45'	13.64 m	21410	720	581	14' 10"	4.52	26' 4"	8.02	9900	4450	
4205	5			25690	862	697	18' 6"	5.64	30' 0"	9.14	11900	5400	
4206	6			29980	1004	813	22' 2"	6.76	33' 8"	10.25	14300	6500	
4207	7			34260	1147	929	25' 10"	7.87	37' 4"	11.37	16700	7600	
4208	8			38540	1289	1045	29' 6"</						

Flat Bottom Bins | Stiffened with Walk-in Door

Model Number	Tiers	Diameter		Capacity ⁽¹⁾			Eaves Height		Overall Height ⁽⁴⁾		Weight		
		#	ft	m	bu ⁽²⁾	m ³	tonnes ⁽³⁾	ft	m	ft	m	lb	kg
1505	5	15'	4.55	2940	98	80	18' 6"	5.64	22' 7"	6.89	3200	1450	
1506	6			3490	116	95	22' 2"	6.76	26' 3"	8.01	3600	1600	
1507	7			4040	134	109	25' 10"	7.87	29' 11"	9.13	4100	1850	
1508	8			4580	153	124	29' 6"	8.99	33' 7"	10.25	4500	2000	
1509	9			5130	171	139	33' 2"	10.11	37' 3"	11.36	5000	2300	
1510 *	10			5670	189	154	36' 10"	11.23	40' 10"	12.45	5400	2450	
1511 *	11			6220	207	169	40' 6"	12.35	44' 6"	13.57	6000	2750	
1512 *	12				225	184	44' 2"	13.46	48' 2"	14.68	6800	3100	
1805	5			4290	143	116	18' 6"	5.64	23' 6"	7.16	3800	1750	
1806	6			5080	169	138	22' 2"	6.76	27' 2"	8.27	4300	1950	
1807	7			5860	196	159	25' 10"	7.87	30' 10"	9.39	4800	2150	
1808	8	18'	5.46	6650	222	180	29' 6"	8.99	34' 6"	10.51	5300	2400	
1809	9			7440	248	202	33' 2"	10.11	38' 2"	11.63	6000	2750	
1810 *	10			8220	274	223	36' 10"	11.23	41' 8"	12.71	6700	3050	
1811 *	11			9010	300	244	40' 6"	12.35	45' 4"	13.83	7500	3400	
1812 *	12			9800	326	266	44' 2"	13.46	49' 0"	14.95	8200	3700	
2105	5			5910	198	160	18' 6"	5.64	24' 4"	7.42	4500	2050	
2106	6			6980	233	189	22' 2"	6.76	28' 0"	8.54	5000	2300	
2107	7			8050	269	218	25' 10"	7.87	31' 8"	9.65	5700	2600	
2108	8			9130	304	248	29' 6"	8.99	35' 4"	10.77	6200	2850	
2109	9			10200	340	277	33' 2"	10.11	39' 0"	11.89	7100	3200	
2110 *	10			11270	375	306	36' 10"	11.23	42' 7"	12.97	7700	3500	
2111 *	11			12340	411	335	40' 6"	12.35	46' 3"	14.09	8800	4000	
2112 *	12			13410	447	364	44' 2"	13.46	49' 11"	15.21	9600	4350	
2405	5	24'	7.28	7820	261	212	18' 6"	5.64	25' 2"	7.68	5400	2450	
2406	6			9220	308	250	22' 2"	6.76	28' 10"	8.80	6100	2750	
2407	7			10620	354	288	25' 10"	7.87	32' 6"	9.92	7000	3200	
2408	8			12010	401	326	29' 6"	8.99	36' 2"	11.03	7700	3500	
2409	9			13410	447	364	33' 2"	10.11	39' 10"	12.15	8800	4000	
2410 *	10			14810	494	402	36' 10"	11.23	43' 5"	13.24	9600	4350	
2411 *	11			16210	540	440	40' 6"	12.35	47' 1"	14.35	11000	5000	
2412 *	12			17610	587	478	44' 2"	13.46	50' 9"	15.47	12000	5450	
2705	5	27'	8.19	10020	335	272	18' 6"	5.64	26' 1"	7.94	6100	2800	
2706	6			11790	394	320	22' 2"	6.76	29' 9"	9.06	6800	3100	
2707	7			13560	453	368	25' 10"	7.87	33' 5"	10.18	7700	3500	
2708	8			15330	511	416	29' 6"	8.99	37' 1"	11.30	8400	3800	
2709	9			17100	570	464	33' 2"	10.11	40' 9"	12.41	9500	4300	
2710 *	10			18870	629	512	36' 10"	11.23	44' 3"	13.50	10200	4650	
2711 *	11			20640	688	560	40' 6"	12.35	47' 11"	14.62	11400	5150	
2712 *	12			22410	747	608	44' 2"	13.46	51' 7"	15.73	13200	6000	
3005	5	30'	9.1	12510	419	339	18' 6"	5.64	26' 6"	8.09	7000	3150	
3006	6			14700	491	399	22' 2"	6.76	30' 2"	9.20	7700	3500	
3007	7			16880	564	458	25' 10"	7.87	33' 10"	10.32	8700	3950	
3008	8			19070	637	517	29' 6"	8.99	37' 6"	11.44	9500	4300	
3009	9			21250	709	577	33' 2"	10.11	41' 2"	12.56	10800	4900	
3010 *	10			23440	782	636	36' 10"	11.23	44' 8"	13.62	11800	5350	
3011 *	11			25620	855	695	40' 6"	12.35	48' 4"	14.74	13400	6050	
3012 *	12			27810	927	754	44' 2"	13.46	52' 0"	15.86	14900	6750	
3305	5	33'	10.01	15320	513	416	18' 6"	5.64	27' 5"	8.35	7900	3600	
3306	6			17970	601	487	22' 2"	6.76	31' 1"	9.47	8900	4050	
3307	7			20610	689	559	25' 10"	7.87	34' 9"	10.58	10000	4550	
3308	8			23250	777	631	29' 6"	8.99	38' 5"	11.70	11200	5050	
3309	9			25900	865	702	33' 2"	10.11	42' 1"	12.82	12500	5700	
3310 *	10			28540	952	774	36' 10"	11.23	45' 7"	13.89	13900	6300	
3311 *	11			31190	1040	846	40' 6"	12.35	49' 3"	15.00	15600	7100	
3312 *	12			33830	1128	918	44' 2"	13.46	52' 11"	16.12	17500	7900	
360													

Flat Bottom Bins Stiffened with Commercial Door Unstructured Roof												
Model Number	Tiers	Diameter		Capacity ⁽¹⁾			Eaves Height		Overall Height ⁽⁴⁾		Weight	
		#	ft	m	bu ⁽²⁾	m ³	tonnes ⁽³⁾	ft	m	ft	m	lb
1513	13	15'	4.55	7310	243	198	47' 10"	14.58	51' 10"	15.80	7700	3500
1514	14			7860	262	213	51' 6"	15.70	55' 6"	16.92	8300	3750
1813	13			10580	352	287	47' 10"	14.58	52' 8"	16.06	9200	4200
1814	14			11370	379	308	51' 6"	15.70	56' 4"	17.18	9900	4500
1815	15			12160	405	330	55' 2"	16.82	60' 0"	18.30	10800	4900
1816	16			12940	431	351	58' 10"	17.93	63' 8"	19.42	12000	5450
1817	17			13730	457	372	62' 6"	19.05	67' 4"	20.53	13300	6050
2113	13			14480	482	393	47' 10"	14.58	53' 7"	16.33	11000	4950
2114	14			15550	518	422	51' 6"	15.70	57' 3"	17.44	11800	5350
2115	15			16620	553	451	55' 2"	16.82	60' 11"	18.56	13100	5950
2116	16	21'	6.37	17690	589	480	58' 10"	17.93	64' 7"	19.68	14100	6400
2117	17			18760	625	509	62' 6"	19.05	68' 3"	20.80	15900	7200
2118	18			19830	660	538	66' 2"	20.17	71' 11"	21.91	17900	8150
2119	19			20900	696	567	69' 10"	21.29	75' 7"	23.03	19300	8750
2413	13			19010	633	516	47' 10"	14.58	54' 5"	16.59	13100	5950
2414	14			20410	680	553	51' 6"	15.70	58' 1"	17.71	14500	6600
2415	15			21800	726	591	55' 2"	16.82	61' 9"	18.82	15800	7200
2416	16			23200	773	629	58' 10"	17.93	65' 5"	19.94	17300	7850
2417	17			24600	819	667	62' 6"	19.05	69' 1"	21.06	18400	8350
2418	18			26010	866	705	66' 2"	20.17	72' 9"	22.18	20300	9200
2419	19			27410	912	743	69' 10"	21.29	76' 5"	23.30	22100	10050
2420	20			28800	959	781	73' 6"	22.41	80' 1"	24.42	24200	11000
2421	21			30200	1005	819	77' 2"	23.53	83' 9"	25.54	27000	12250
2422	22			31600	1052	857	80' 10"	24.65	87' 5"	26.65	29700	13500
2713	13	24'	7.28	24180	806	656	47' 10"	14.58	55' 3"	16.85	15500	7050
2714	14			25950	864	704	51' 6"	15.70	58' 11"	17.97	17600	8000
2715	15			27720	923	752	55' 2"	16.82	62' 7"	19.09	18600	8450
2716	16			29490	982	800	58' 10"	17.93	66' 3"	20.20	20500	9300
2717	17			31270	1041	848	62' 6"	19.06	70' 0"	21.33	22500	10200
2718	18			33040	1100	896	66' 2"	20.17	73' 8"	22.45	24800	11250
2719	19			34810	1159	944	69' 10"	21.29	77' 4"	23.56	26200	11900
2720	20			36580	1218	992	73' 6"	22.41	81' 0"	24.68	28800	13050
2721	21			38350	1276	1040	77' 2"	23.53	84' 8"	25.80	31400	14250
2722	22			40120	1335	1088	80' 10"	24.65	88' 4"	26.92	34800	15800
2723	23			41890	1394	1136	84' 6"	25.76	92' 0"	28.03	38400	17400
2724	24			43660	1453	1184	88' 2"	26.88	95' 8"	29.15	40800	18500
2725	25			45430	1512	1232	91' 10"	28.00	99' 4"	30.27	45100	20450
3013	13	30'	9.1	30000	1000	814	47' 10"	14.58	55' 8"	16.98	17300	7850
3014	14			32180	1072	873	51' 6"	15.70	59' 4"	18.09	19200	8700
3015	15			34370	1145	932	55' 2"	16.82	63' 0"	19.21	21800	9900
3016	16			36560	1218	992	58' 10"	17.94	66' 9"	20.33	24700	11200
3017	17			38750	1291	1051	62' 6"	19.06	70' 5"	21.45	26500	12000
3018	18			40930	1363	1110	66' 2"	20.17	74' 1"	22.57	29200	13250
3019	19			43120	1436	1170	69' 10"	21.29	77' 9"	23.69	31100	14100
3020	20			45300	1509	1229	73' 6"	22.41	81' 5"	24.80	33700	15300
3021	21			47490	1581	1288	77' 2"	23.53	85' 1"	25.92	36100	16400
3022	22			49670	1654	1347	80' 10"	24.65	88' 9"	27.04	39900	18100
3023	23			51860	1726	1407	84' 6"	25.76	92' 5"	28.16	42900	19450
3024	24			54040	1799	1466	88' 2"	26.88	96' 1"	29.28	47100	21350
3025	25			56230	1872	1525	91' 10"	28.00	99' 9"	30.39	52700	23900
3026	26			58420	1944	1584	95' 6"	29.12	103' 5"	31.51	56800	25800
3313	13	33'	10.01	36470	1216	989	47' 10"	14.58	56' 7"	17.24	19200	8700
3314	14			39120	1304	1061	51' 6"	15.70	60' 3"	18.36	21200	9650
3315	15			41760	1392	1133	55' 2"	16.82	63' 11"	19.47	24100	10900
3316	16			44410	1480	1204	58' 10"	17.93	67' 7"	20.59	27600	12500
3317	17			4707								

Flat Bottom Bins | Stiffened with Commercial Door | Unstructured Roof

Model Number	Tiers	Diameter		Capacity ⁽¹⁾			Eaves Height		Overall Height ⁽⁴⁾		Weight	
		#	ft	m	bu ⁽²⁾	m ³	tonnes ⁽³⁾	ft	m	ft	m	lb
5111	11	51'	15.46	77060	2576	2090	40' 6"	12.35	54' 2"	16.52	33000	14950
5112	12			83380	2785	2262	44' 2"	13.46	57' 10"	17.64	36400	16500
5113	13			89690	2995	2433	47' 10"	14.58	61' 6"	18.75	39700	18000
5114	14			96010	3205	2604	51' 6"	15.70	65' 2"	19.87	44100	20000
5115	15			102320	3415	2775	55' 2"	16.82	68' 10"	20.99	47400	21500
5116	16			108640	3625	2947	58' 10"	17.93	72' 6"	22.11	52000	23550
5117	17			114990	3836	3119	62' 6"	19.06	76' 3"	23.23	56400	25600
5118	18			121310	4046	3290	66' 2"	20.17	79' 11"	24.35	60800	27550
5119	19			127620	4256	3462	69' 10"	21.29	83' 7"	25.47	66600	30200
5120	20			133940	4466	3633	73' 6"	22.41	87' 3"	26.58	71000	32200
5121	21			140250	4675	3804	77' 2"	23.53	90' 11"	27.70	76800	34850
5122	22			146570	4885	3975	80' 10"	24.65	94' 7"	28.82	88000	39900
5123	23			152880	5095	4147	84' 6"	25.76	98' 3"	29.94	98600	44750
5124	24			159200	5305	4318	88' 2"	26.88	101' 11"	31.05	108900	49400
5125	25			165510	5515	4489	91' 10"	28.00	105' 7"	32.17	121300	55050
5410	10	54'	16.37	79800	2669	2164	36' 10"	11.23	51' 5"	15.66	33800	15300
5411	11			86880	2904	2356	40' 6"	12.35	55' 1"	16.78	37100	16850
5412	12			93960	3140	2549	44' 2"	13.46	58' 0"	17.90	40900	18550
5413	13			101040	3375	2741	47' 10"	14.58	62' 5"	19.02	44600	20250
5414	14			108120	3610	2933	51' 6"	15.70	66' 1"	20.13	49600	22500
5415	15			115200	3846	3125	55' 2"	16.82	69' 9"	21.25	54100	24550
5416	16			122280	4081	3317	58' 10"	17.93	73' 5"	22.37	58500	26550
5417	17			129400	4317	3510	62' 6"	19.06	77' 1"	23.49	63500	28800
5418	18			136480	4553	3702	66' 2"	20.17	80' 9"	24.61	69300	31400
5419	19			143560	4788	3894	69' 10"	21.29	84' 5"	25.73	74300	33700
5420	20			150640	5023	4086	73' 6"	22.41	88' 1"	26.85	80500	36500
5421	21			157720	5259	4278	77' 2"	23.53	91' 9"	27.96	86000	39000
5422	22			164800	5494	4470	80' 10"	24.65	95' 5"	29.08	92800	42100
5423	23			171880	5729	4662	84' 6"	25.76	99' 1"	30.20	102500	46500
5424	24			178960	5964	4854	88' 2"	26.88	102' 9"	31.32	113300	51400
5425	25			186040	6200	5046	91' 10"	28.00	106' 5"	32.43	127100	57650

Flat Bottom Bins | Stiffened with Commercial Door | Structured Roof

Model Number	Tiers	Diameter		Capacity ⁽¹⁾			Eaves Height		Overall Height ⁽⁴⁾		Weight	
		#	ft	m	bu ⁽²⁾	m ³	tonnes ⁽³⁾	ft	m	ft	m	lb
4813	13	48'	14.55	78550	2623	2131	47' 10"	14.58	60' 10"	18.55	41000	18600
4814	14			84150	2809	2282	51' 6"	15.70	64' 0"	19.67	44600	20200
4815	15			89740	2994	2434	55' 2"	16.82	68' 2"	20.79	47700	21650
4816	16			95330	3180	2586	58' 10"	17.93	71' 10"	21.90	52000	23600
4817	17			100930	3366	2738	62' 6"	19.05	75' 6"	23.02	54700	24800
4818	18			106550	3553	2890	66' 2"	20.17	79' 3"	24.15	58800	26650
4819	19			112150	3739	3042	69' 10"	21.29	82' 11"	25.26	64000	29000
4820	20			117740	3925	3194	73' 6"	22.41	86' 7"	26.38	69400	31500
4821	21			123340	4111	3345	77' 2"	23.53	90' 3"	27.50	77800	35250
4822	22			128930	4297	3497	80' 10"	24.65	93' 11"	28.62	87800	39800
4823	23			134530	4483	3649	84' 6"	25.76	97' 7"	29.73	98400	44600
4824	24			140120	4669	3801	88' 2"	26.88	101' 3"	30.85	108000	49000
5111	11	51'	15.46	76570	2559	2077	40' 6"	12.35	54' 2"	16.52	38100	17300
5112	12			82880	2769	2248	44' 2"	13.46	57' 10"	17.64	41500	18850
5113	13			89200	2979	2419	47' 10"	14.58	61' 6"	18.75	44900	20350
5114	14			95510	3189	2591	51' 6"	15.70	65' 2"	19.87	49200	22300
5115	15			101830	3399	2762	55' 2"	16.82	68' 10"	20.99	52500	23850
5116	16			108140	3608	2933	58' 10"	17.93	72' 6"	22.11	57100	25900
5117	17											

Flat Bottom Bins | Stiffened with Commercial Door | Structured Roof

Model Number	Tiers	Diameter		Capacity ⁽¹⁾			Eaves Height		Overall Height ⁽⁴⁾		Weight	
		FT	M	BU ⁽²⁾	M ³	Tonnes ⁽³⁾	FT	M	FT	M	LB	KG
7208	8	72'	21.83	119870	4025	3251	29' 6"	8.99	49' 10"	15.18	54300	24650
7209	9			132460	4443	3593	33' 2"	10.11	53' 6"	16.29	59900	27200
7210	10			145050	4861	3934	36' 10"	11.23	57' 2"	17.41	65300	29650
7211	11			157630	5280	4276	40' 6"	12.35	60' 10"	18.53	71400	32400
7212	12			170220	5698	4617	44' 2"	13.46	64' 6"	19.65	78100	35450
7213	13			182810	6116	4959	47' 10"	14.58	68' 2"	20.76	85200	38650
7214	14			195400	6534	5300	51' 6"	15.70	71' 10"	21.88	91600	41500
7215	15			207980	6953	5641	55' 2"	16.82	75' 6"	23.00	100700	45700
7216	16			220640	7373	5985	58' 10"	17.94	79' 2"	24.12	109700	49750
7217	17			233230	7792	6326	62' 6"	19.06	82' 10"	25.24	119500	54200
7218	18			245810	8210	6667	66' 2"	20.17	86' 6"	26.36	128000	58050
7219	19			258400	8628	7009	69' 10"	21.29	90' 2"	27.48	137900	62550
7220	20			270990	9046	7350	73' 6"	22.41	93' 10"	28.59	148400	67300
7221	21			283570	9465	7692	77' 2"	23.53	97' 6"	29.71	160700	72850
7222	22			296160	9883	8033	80' 10"	24.65	101' 2"	30.83	171100	77600
7223	23			308750	10301	8374	84' 6"	25.76	104' 10"	31.95	185100	83950
7224	24			321330	10720	8716	88' 2"	26.88	108' 6"	33.06	196100	88950
7225	25			333920	11138	9057	91' 10"	28.00	112' 2"	34.18	211100	95750
7226	26			346510	11556	9399	95' 6"	29.12	115' 10"	35.30	222300	100850
7508	8	75'	22.74	131260	4408	3560	29' 6"	8.99	50' 8"	15.44	58100	26350
7509	9			144910	4862	3931	33' 2"	10.11	54' 4"	16.56	64000	29000
7510	10			158570	5316	4301	36' 10"	11.23	58' 0"	17.67	70100	31750
7511	11			172230	5770	4672	40' 6"	12.35	61' 8"	18.79	77300	35050
7512	12			185890	6224	5042	44' 2"	13.46	65' 4"	19.91	83900	38050
7513	13			199540	6678	5412	47' 10"	14.58	69' 0"	21.03	91300	41400
7514	14			213200	7131	5783	51' 6"	15.70	72' 8"	22.14	99000	44900
7515	15			226860	7585	6153	55' 2"	16.82	76' 4"	23.26	108600	49250
7516	16			240590	8042	6526	58' 10"	17.94	80' 0"	24.39	117900	53450
7517	17			254250	8496	6896	62' 6"	19.06	83' 8"	25.50	128100	58100
7518	18			267910	8949	7267	66' 2"	20.17	87' 4"	26.62	138000	62550
7519	19			281560	9403	7637	69' 10"	21.29	91' 0"	27.74	149200	67650
7520	20			295220	9857	8008	73' 6"	22.41	94' 8"	28.86	160300	72700
7521	21			308880	10311	8378	77' 2"	23.53	98' 4"	29.97	174300	79050
7522	22			322540	10765	8749	80' 10"	24.65	102' 0"	31.09	186800	84700
7523	23			336190	11219	9119	84' 6"	25.76	105' 8"	32.21	201200	91250
7524	24			349850	11673	9489	88' 2"	26.88	109' 4"	33.33	213000	96600
7525	25			363350	12127	9860	91' 10"	28.00	113' 0"	34.44	228100	103450
7526	26			377170	12580	10230	95' 6"	29.12	116' 8"	35.56	240200	108950
7808	8	78'	23.65	143250	4812	3885	29' 6"	8.99	51' 6"	15.70	65100	29550
7809	9			158020	5303	4286	33' 2"	10.11	55' 2"	16.82	71800	32550
7810	10			172790	5794	4687	36' 10"	11.23	58' 10"	17.94	78100	35450
7811	11			187560	6285	5087	40' 6"	12.35	62' 6"	19.05	86200	39100
7812	12			202330	6776	5488	44' 2"	13.46	66' 2"	20.17	93000	42150
7813	13			217100	7267	5889	47' 10"	14.58	69' 10"	21.29	101800	46200
7814	14			231880	7758	6289	51' 6"	15.70	73' 6"	22.41	110100	49950
7815	15			246730	8252	6692	55' 2"	16.82	77' 2"	23.53	121400	55050
7816	16			261500	8742	7093	58' 10"	17.94	80' 10"	24.65	129800	58850
7817	17			276280	9233	7494	62' 6"	19.06	84' 6"	25.77	141500	64150
7818	18			291050	9724	7894	66' 2"	20.17	88' 2"	26.88	151800	68850
7819	19			305820	10215	8295	69' 10"	21.29	91' 10"	28.00	166000	75300
7820	20			320590	10706	8696	73' 6"	22.41	95' 0"	29.12	177800	80650
7821	21			335360	11197	9096	77' 2"	23.53	99' 0"	30.24	193600	87800
7822	22			350140	11688	9497	80' 10"	24.65	102' 10"	31.35	205500	93200
7823	23			364910	12179	9898	84' 6"	25.76	106' 6"	32.47	221600	100500
7824	24			379680	12670	10298	88' 2"	26.88	110' 2"	33.59	23400	

Flat Bottom Bins | Stiffened with Commercial Door | Structured Roof

MODEL NUMBER	TIERS	DIAMETER		CAPACITY ⁽¹⁾			EAVES HEIGHT		OVERALL HEIGHT ⁽⁴⁾		WEIGHT	
		#	FT	M	BU ⁽²⁾	M ³	TONNES ⁽³⁾	FT	M	FT	M	LB
10208	8	102'	30.93 m	261690	8813	7098	29' 6"	8.99	58' 3"	17.74	117700	53400
10209	9			286950	9653	7783	33' 2"	10.11	61' 11"	18.86	128300	58200
10210	10			312210	10492	8468	36' 10"	11.23	65' 7"	19.98	140200	63600
10211	11			337470	11332	9154	40' 6"	12.35	69' 3"	21.10	154900	70250
10212	12			362730	12171	9839	44' 2"	13.46	72' 11"	22.21	169900	77050
10213	13			388000	13010	10524	47' 10"	14.58	76' 7"	23.33	185000	83900
10214	14			413400	13855	11213	51' 6"	15.70	80' 3"	24.46	202200	91700
10215	15			438660	14694	11898	55' 2"	16.82	83' 11"	25.57	220500	100000
10216	16			463920	15534	12583	58' 10"	17.94	87' 7"	26.69	236700	107350
10217	17			489180	16373	13269	62' 6"	19.06	91' 3"	27.81	257600	116800
10218	18			514440	17213	13954	66' 2"	20.17	94' 11"	28.93	276300	125300
10219	19			539700	18052	14639	69' 10"	21.29	98' 7"	30.04	299300	135750
10220	20			564960	18892	15324	73' 6"	22.41	102' 3"	31.16	321100	145650
10221	21			590230	19731	16009	77' 2"	23.53	105' 11"	32.28	346400	157100
10222	22			615490	20570	16695	80' 10"	24.65	109' 7"	33.40	368300	167050
10223	23			640750	21410	17380	84' 6"	25.76	113' 3"	34.51	396400	179800
10224	24			666010	22249	18065	88' 2"	26.88	116' 11"	35.63	417900	189500
10508	8	105'	31.83 m	279130	9403	7571	29' 6"	8.99	59' 1"	18.01	126500	57400
10509	9			305900	10293	8297	33' 2"	10.11	62' 9"	19.12	137500	62350
10510	10			332670	11182	9023	36' 10"	11.23	66' 5"	20.24	149800	67950
10511	11			359440	12072	9749	40' 6"	12.35	70' 1"	21.36	164900	74800
10512	12			386210	12962	10476	44' 2"	13.46	73' 9"	22.48	180400	81800
10513	13			412980	13851	11202	47' 10"	14.58	77' 5"	23.59	195900	88850
10514	14			439900	14746	11932	51' 6"	15.70	81' 1"	24.72	215000	97500
10515	15			466670	15635	12658	55' 2"	16.82	84' 0"	25.84	234000	106150
10516	16			493430	16525	13384	58' 10"	17.94	88' 5"	26.95	251900	114250
10517	17			520200	17415	14110	62' 6"	19.06	92' 1"	28.07	273400	124000
10518	18			546970	18304	14836	66' 2"	20.17	95' 9"	29.19	292800	132800
10519	19			573740	19194	15562	69' 10"	21.29	99' 8"	30.31	319500	144900
10520	20			600050	20083	16288	73' 6"	22.41	103' 1"	31.42	341900	155050
10521	21			627280	20973	17014	77' 2"	23.53	106' 9"	32.54	368000	166900
10522	22			654050	21862	17740	80' 10"	24.65	110' 5"	33.66	390600	177150
10523	23			680810	22752	18466	84' 6"	25.76	114' 1"	34.78	419400	190200
10524	24			707580	23642	19193	88' 2"	26.88	117' 9"	35.89	441100	200050
10808	8	108'	32.74 m	297240	10016	8062	29' 6"	8.99	59' 11"	18.27	130600	59200
10809	9			325560	10957	8830	33' 2"	10.11	63' 7"	19.39	143200	64950
10810	10			353880	11898	9599	36' 10"	11.23	67' 3"	20.50	158100	71700
10811	11			382200	12840	10367	40' 6"	12.35	70' 11"	21.62	173400	78650
10812	12			410520	13781	11135	44' 2"	13.46	74' 7"	22.74	189300	85850
10813	13			438840	14722	11903	47' 10"	14.58	78' 3"	23.86	206800	93800
10814	14			467320	15668	12676	51' 6"	15.70	81' 11"	24.98	226600	102750
10815	15			495640	16609	13444	55' 2"	16.82	85' 7"	26.10	247500	112250
10816	16			523960	17551	14212	58' 10"	17.94	89' 3"	27.22	265900	120600
10817	17			552280	18492	14980	62' 6"	19.06	92' 11"	28.33	288000	130600
10818	18			580600	19433	15748	66' 2"	20.17	96' 7"	29.45	311100	141050
10819	19			608920	20374	16516	69' 10"	21.29	100' 3"	30.57	338500	153500
10820	20			637240	21315	17285	73' 6"	22.41	103' 11"	31.69	361700	164050
10821	21			665560	22256	18053	77' 2"	23.53	107' 7"	32.80	388500	176200
10822	22			693880	23197	18821	80' 10"	24.65	111' 3"	33.92	413800	187650
10823	23			722200	24139	19589	84' 6"	25.76	114' 11"	35.04	439700	199400

Wide-Corr® Centurion® Hopper Bottom Bins

MODEL	TIERS	CAPACITY				DIMENSIONS						AUGER LENGTH				WEIGHT	LEGS	HOPPER
BU⁽¹⁾	FT⁽²⁾	M⁽³⁾	TONNES⁽³⁾	(A) OVERALL	(B) EAVE	H	D	30°	35°	FT	M	FT	M	LB	KG	#	ANGLE	

<tbl_r cells="19" ix="3" maxcspan="1" maxrspan="1" usedcols="1



AGI is a global leader in supplying farm and commercial customers with the manufacturing, planning, and engineering of full equipment solutions for grain, seed, fertilizer, feed, and food. AGI's expertise enables the storage, blending, mixing, conveying, conditioning, processing, and protection of agricultural products and inputs worldwide.

Your safety is our highest priority.

Please read and understand the operator's manual and safety decals before using. Use and maintain products properly, and do not modify. Keep guards in place when operating and follow all product manuals and safety decals. For all AGI products, if guards, safety decals, or manuals are damaged or missing, contact your AGI sales or dealer representative for replacements. Images and information contained in this brochure are presented for general information.

EasyFlow, Lock-n-Load, Wide-Corr, Centurion, AGI and the rolling hills logo are trademarks of Ag Growth International Inc.

263 Shuman Blvd, Suite 350, Naperville, IL, USA 60563

TF 800.783.9507 | csr.usfarm@aggrowth.com

QMI-SAI Registered | ISO 9001-2015

YouTube icon, Twitter icon, LinkedIn icon, Facebook icon, Instagram icon, @aggrowthintl

AGGROWTH.COM